

EA888 BOOST ADAPTOR


INSTRUCTION MANUAL

SNO-40203

Welcome

Contents

The following pictures may be different from reality and are only for reference.

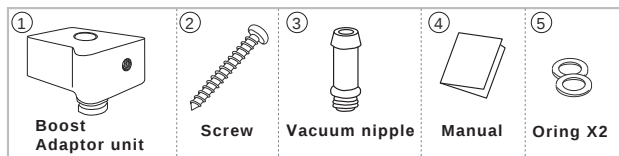

Features

- Installs without cutting any pipe in the engine bay to maintain a completely factory appearance.
- Made of Aluminum
- Anodized finish
- Easy to install

Important

- Please read instructions completely before installing.
- It is highly recommended to consult professionals or a shop to do the installation if you are not familiar with the engine bay.
- Damage or unexpected results due to incorrect installation is out of the product liability. Any loss of personal or property due to incorrect usage is out of our liability of responsibility or compensation.
- Operate/install this product in a well ventilated space to avoid carbon monoxide poisoning.
- Please turn off the engine off at least 1 hour before installation to ensure safety and avoid a check engine light when disassembling any parts.
- Please do not rework, disassemble or modify any part of this product.

Notice

Wait at least one hour to make sure the engine is cooled enough to avoid injury

Please wear safety gloves to prevent heat related injuries.

Installation

Prepare for installation

Turn Off the engine




Open the engine hood

wait for at least 1 hour



Start to install

Step1 : Open the hood and locate the pressure sensor

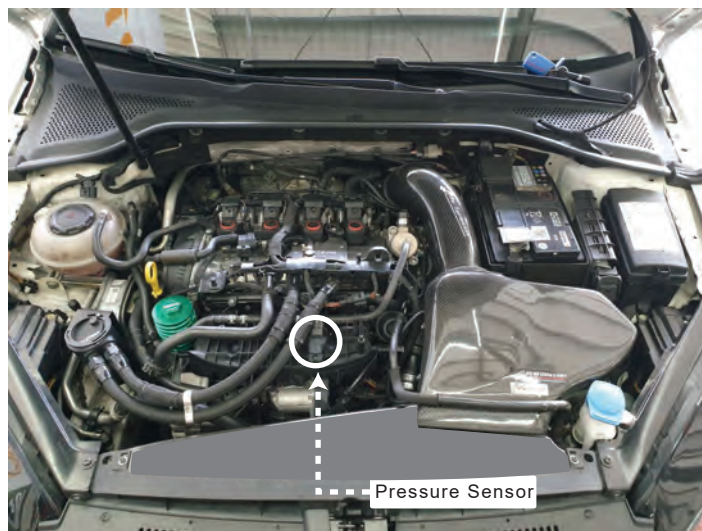

Step 2: How to install the boost tap

